Technical data sheet

Wall connection collar, 3- and 4-sided, duct height 120 mm, FS

Item number: 7218130





Wall connection collar, 4-sided, with integrated seal for PYROLINE® Rapid PLM installation duct. For mounting in the area of wall and ceiling connections as well as wall penetrations. Can also be used as 3-sided wall connection collar for direct wall or ceiling mounting of the duct.

CE Steel St Strip galvanized

FS

Master data


Item number7218130Description 1Wall connection collarDescription 23- and 4-sidedManufacturerOBODimension85x253x273MaterialSteelSurfaceStrip galvanizedSurface standardDIN EN 10346Smallest sales unit1Unit of quantityPiece		
Description 23- and 4-sidedManufacturerOBODimension85x253x273MaterialSteelSurfaceStrip galvanizedSurface standardDIN EN 10346Smallest sales unit1	Item number	7218130
ManufacturerOBODimension85x253x273MaterialSteelSurfaceStrip galvanizedSurface standardDIN EN 10346Smallest sales unit1	Description 1	Wall connection collar
Dimension85x253x273MaterialSteelSurfaceStrip galvanizedSurface standardDIN EN 10346Smallest sales unit1	Description 2	3- and 4-sided
Material Steel Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1	Manufacturer	OBO
Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1	Dimension	85x253x273
Surface standard DIN EN 10346 Smallest sales unit 1	Material	Steel
Smallest sales unit 1	Surface	Strip galvanized
	Surface standard	DIN EN 10346
Unit of quantity Piece	Smallest sales unit	1
	Unit of quantity	Piece
Weight 94.6 kg	Weight	94.6 kg
Weight unit kg/100 pc.	Weight unit	kg/100 pc.

Technical data sheet

Wall connection collar, 3- and 4-sided, duct height 120 mm, FS

Item number: 7218130



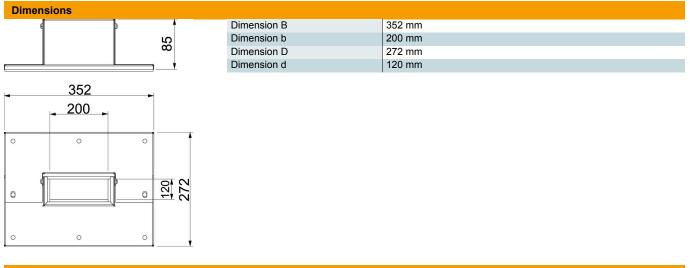

Technical data

Type of accessory	Wall connection collar
Accessories	yes
Spare part	no