

Technical data sheet

Skirting trunking SL 2070

Item number: 6132269



SL skirting trunking for covered cable routing in internal areas. The colour of the trunking bases can vary depending on the production method. With snap-on cover and base, with base perforation for direct wall mounting. Change the direction with the fittings and close the trunking ends with end pieces. Service outlet for installing power and data technology. Tested according to DIN EN 50085-1 and DIN EN 50085-2-1. Base and cover packed as a set in a box. The trunking couplings must be ordered separately.



PVC Polyvinylchloride

Master data

| | |
|---------------------|----------------------|
| Item number | 6132269 |
| Type | SL 2070 lgr |
| Description 1 | Skirting trunking |
| Description 2 | SL Set 20x70 7035 |
| Manufacturer | OBO |
| Colour | Light grey; RAL 7035 |
| Material | Polyvinylchloride |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 48 kg |
| Weight unit | kg/100 m |


Technical data sheet

Skirting trunking SL 2070

Item number: 6132269



Dimensions

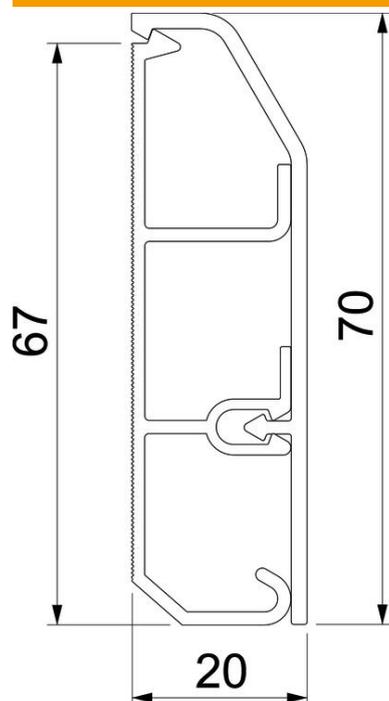

| | |
|--------|----------|
| Length | 2,000 mm |
| Width | 70 mm |
| Height | 20 mm |

Technical data

| | |
|-----------------------------------|---------------------|
| Number of fixed partitions | 2 |
| Decoration | Without |
| Cover sealing lip | Without |
| Halogen-free | no |
| With carpet strip | no |
| Mounting perforation in base | yes |
| Usable cross-section | 820 mm ² |
| Protection rating | IP40 |
| Protective film | no |
| Protection rating IK code | IK06 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |